




SNA 2B: ER graphs: Insights and realism


Lada Adamic

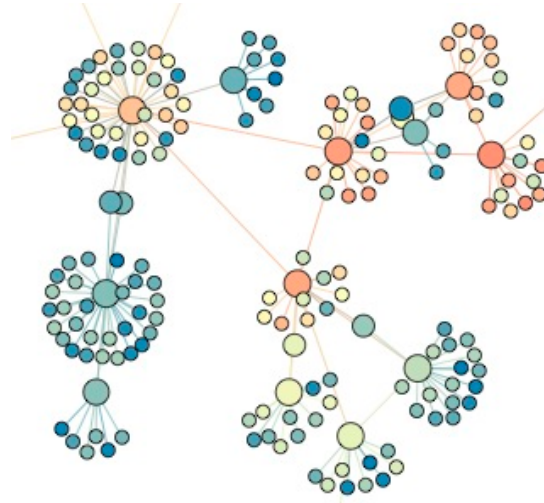

Insights

- ❑ Previously: degree distribution / absence of hubs
 - ❑ Emergence of giant component
 - ❑ Average shortest path
-

Emergence of the giant component

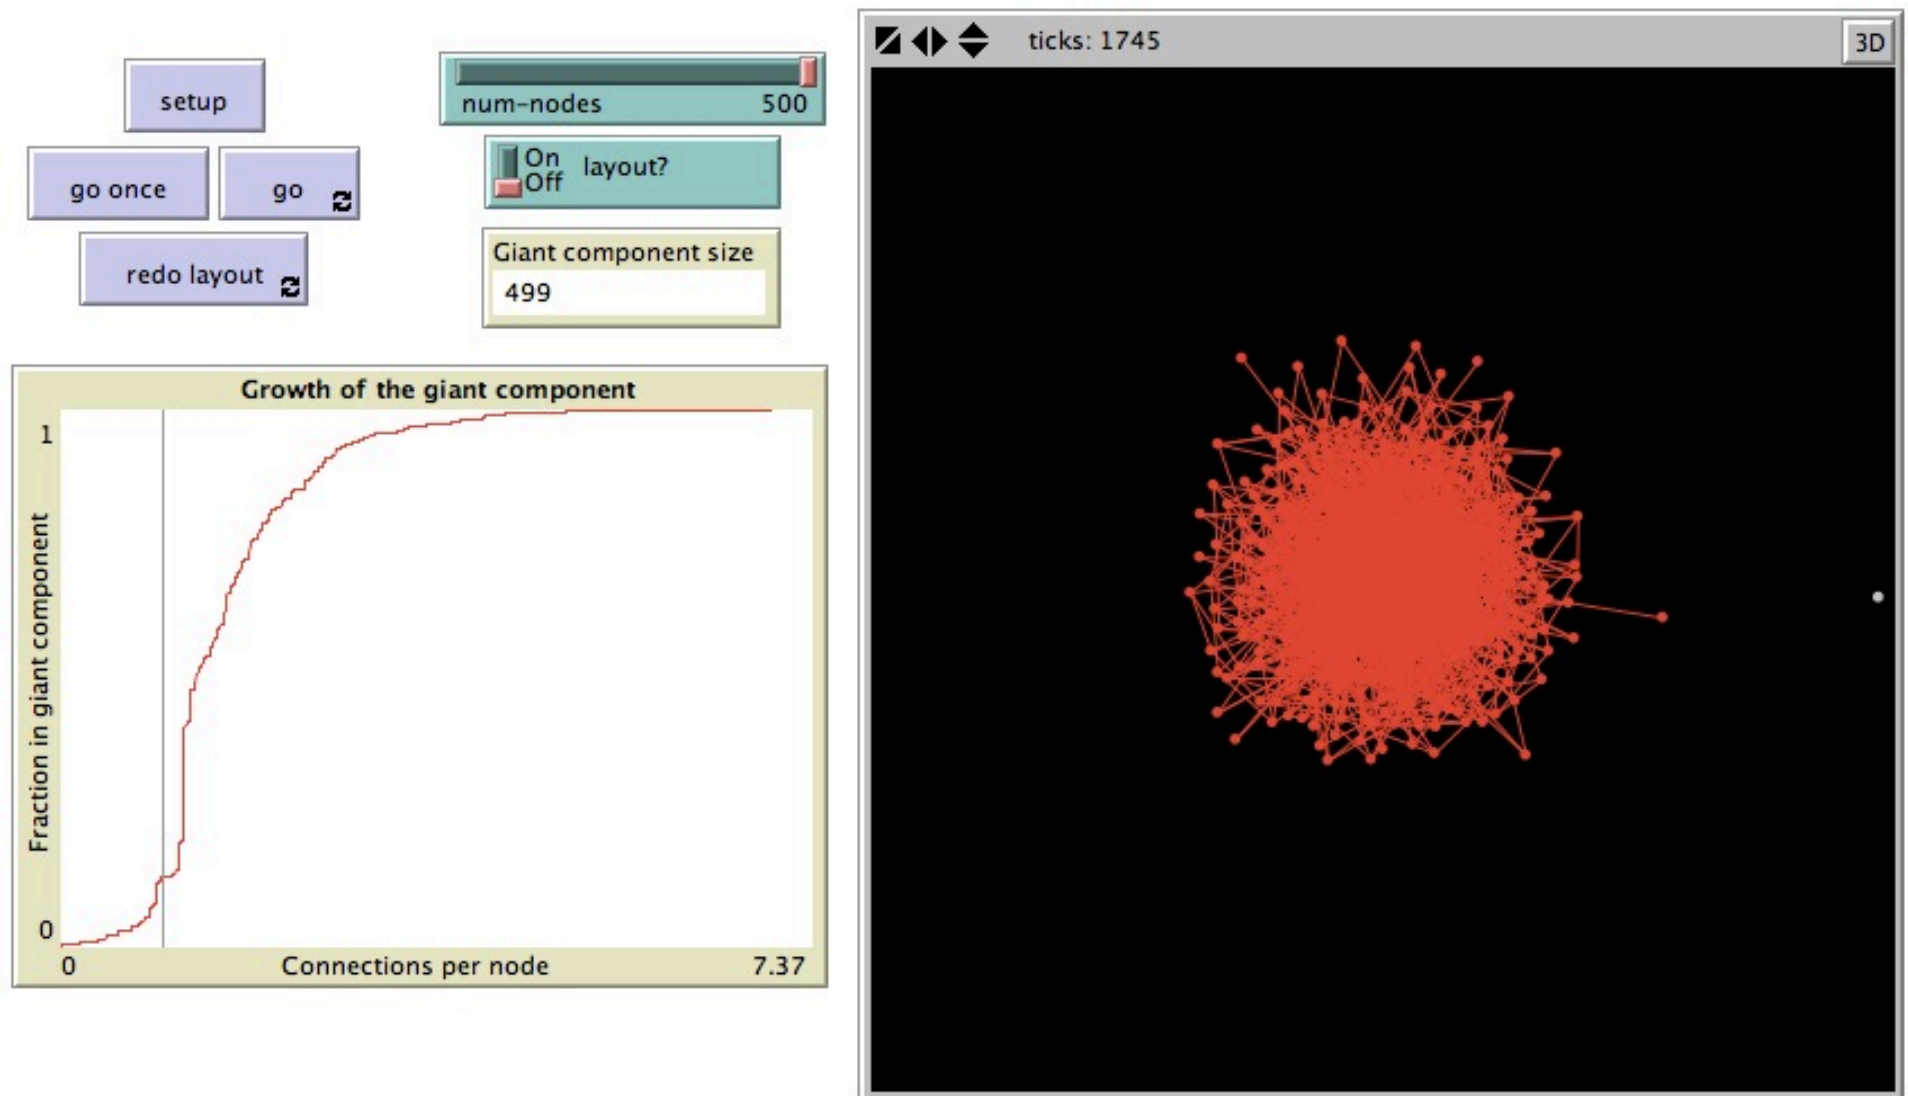

<http://ccl.northwestern.edu/netlogo/models/GiantComponent>

Quiz Q:

■ What is the average degree z at which the giant component starts to emerge?


■ 0

■ 1

■ $3/2$

■ 3

Percolation on a 2D lattice

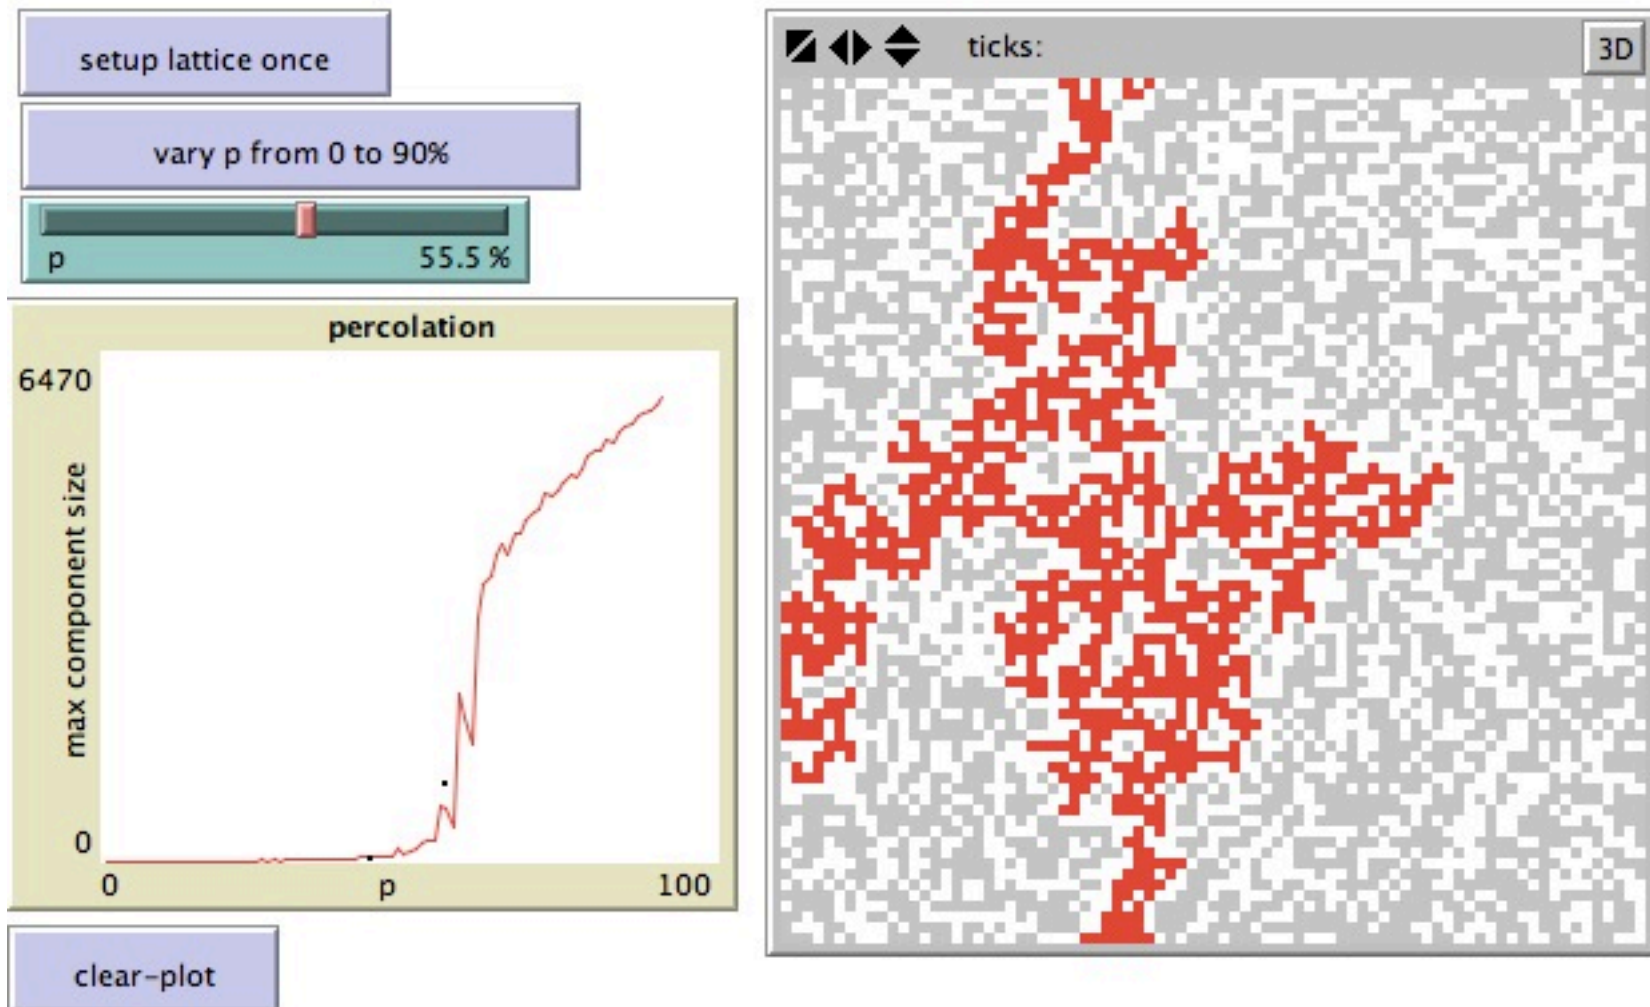

<http://www.ladamic.com/netlearn/NetLogo501/LatticePercolation.html>

Quiz Q:

■ What is the percolation threshold of a 2D lattice: fraction of sites that need to be occupied in order for a giant connected component to emerge?


■ 0

■ $\frac{1}{4}$

■ $\frac{1}{3}$




■ $\frac{1}{2}$

Percolation threshold

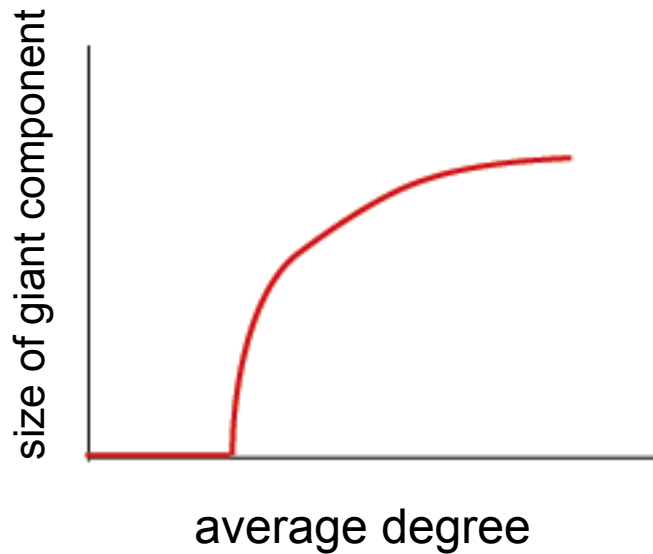

Percolation threshold: how many edges need to be added before the giant component appears?

As the average degree increases to $z = 1$, a giant component suddenly appears

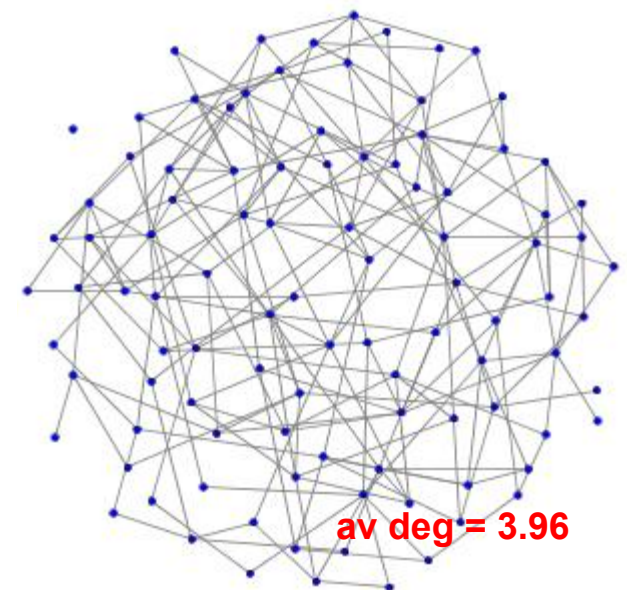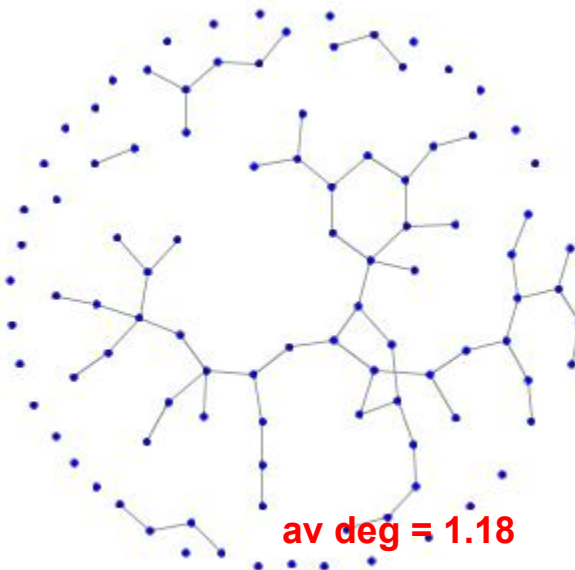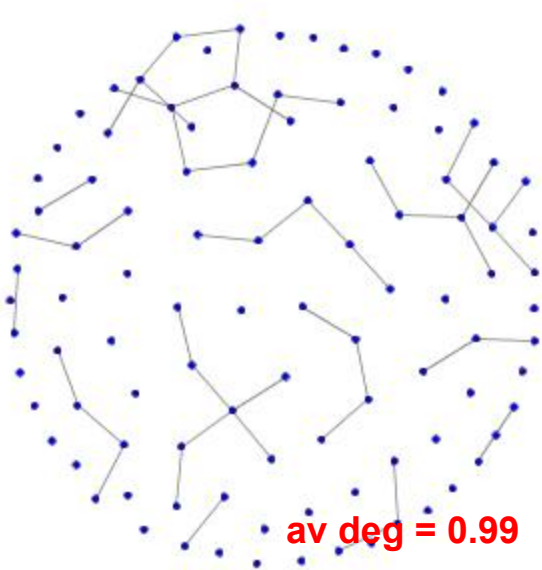

Giant component – another angle


- How many other friends besides you does each of your friends have?
- By property of degree distribution
 - the average degree of your friends, you excluded, is z
 - so at $z = 1$, each of your friends is expected to have another friend, who in turn have another friend, etc.
 - the giant component emerges

Giant component illustrated



Why just one giant component?

- What if you had 2, how long could they be sustained as the network densifies?

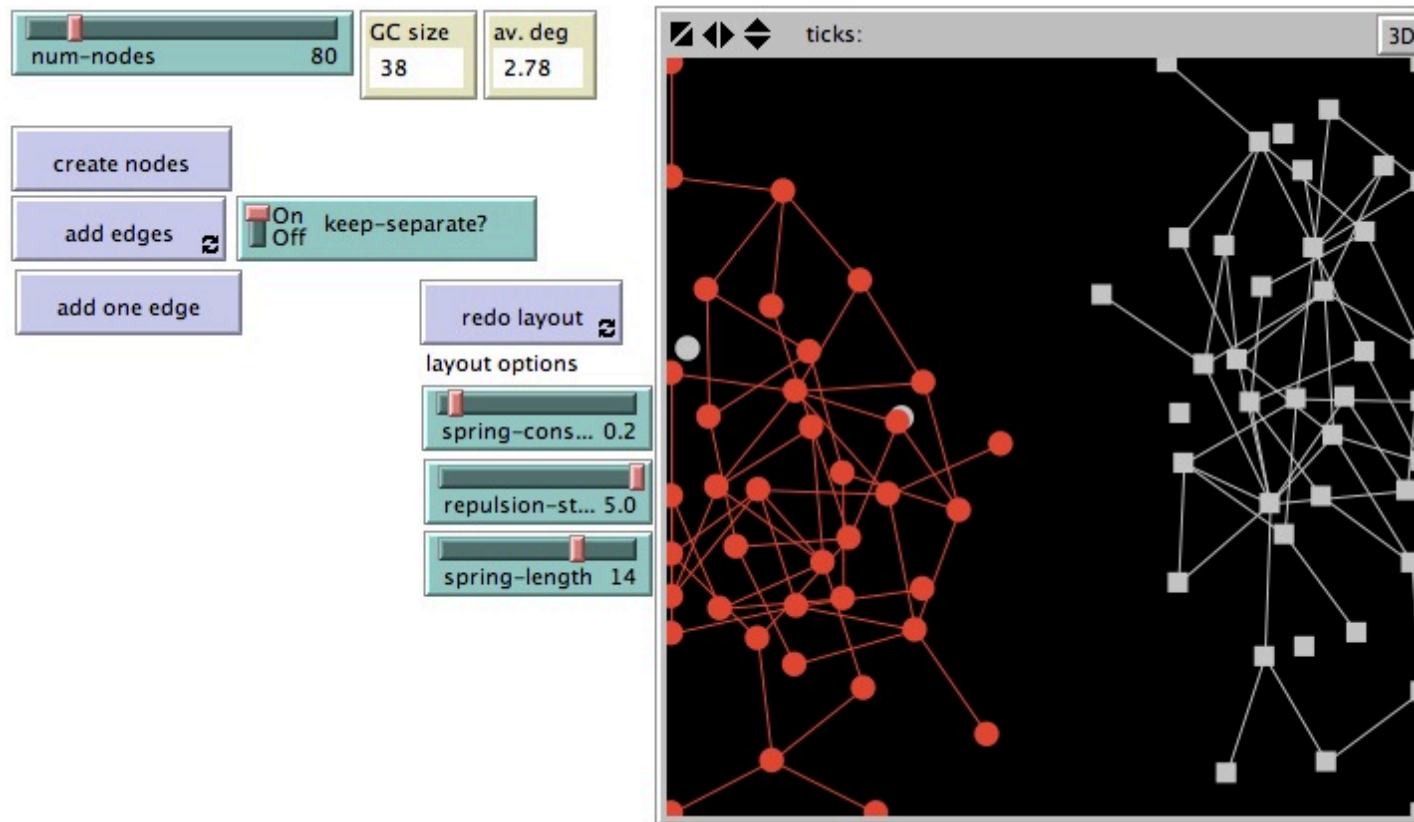

<http://www.ladamic.com/netlearn/NetLogo501/ErdosRenyiTwoComponents.html>

Quiz Q:


- If you have 2 large-components each occupying roughly $1/2$ of the graph, how long does it typically take for the addition of random edges to join them into one giant component
 - 1-4 edge additions
 - 5-20 edge additions
 - over 20 edge additions

Average shortest path


- How many hops on average between each pair of nodes?
- again, each of your friends has **$z = \text{avg. degree}$** friends besides you
- ignoring loops, the number of people you have at distance l is

z^l

Average shortest path

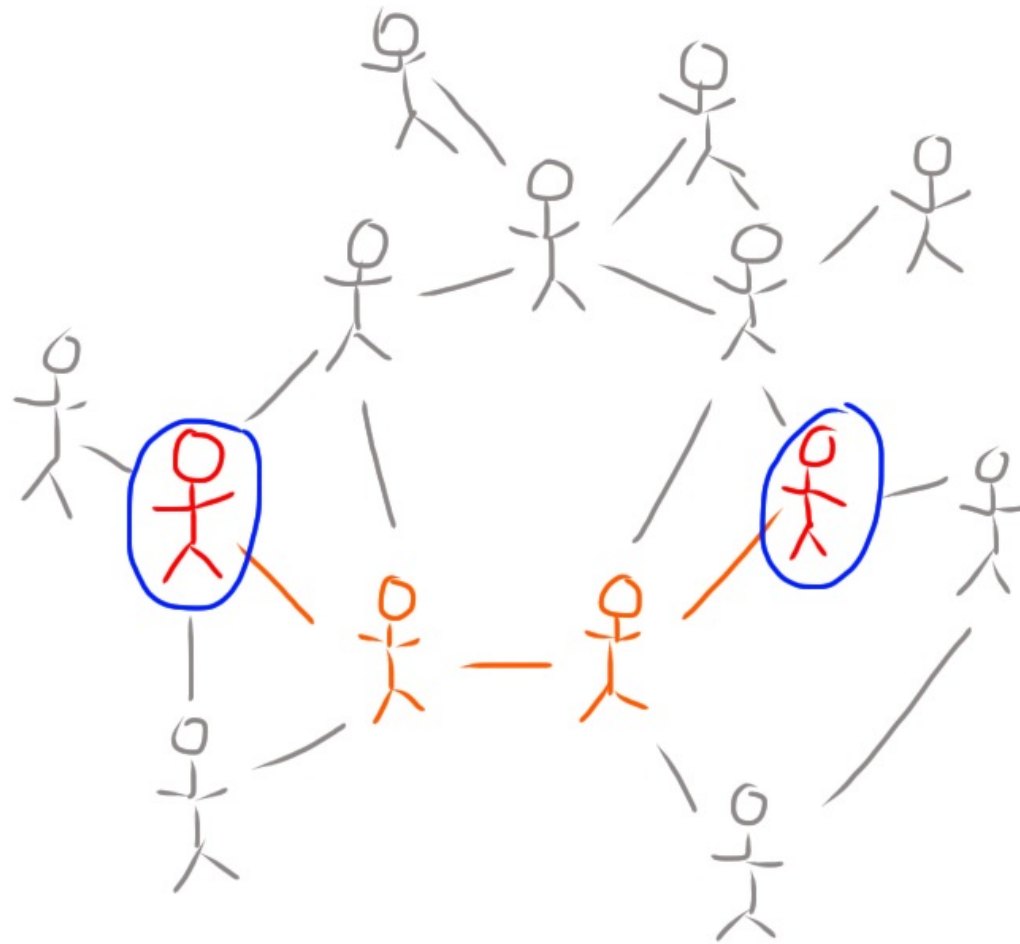

friends at distance l

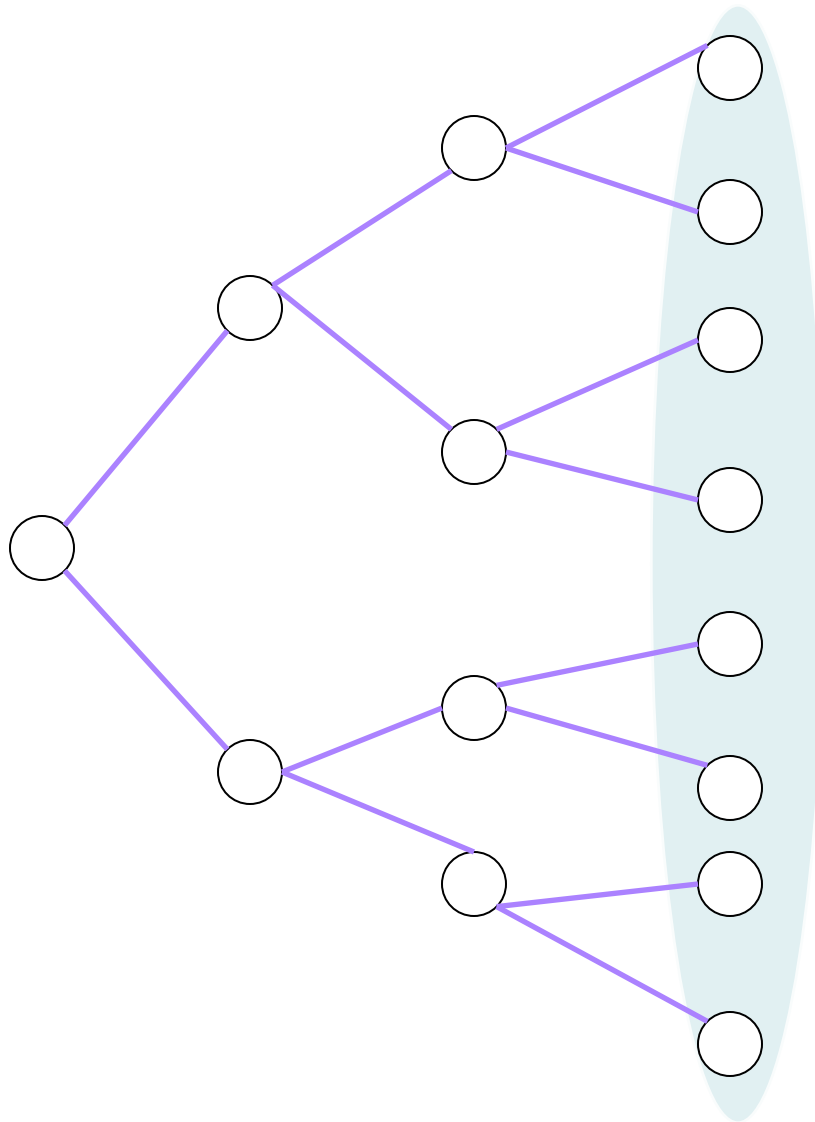


$$N_l = z^l$$

scaling:
average shortest path l_{av}

$$l_{av} \sim \frac{\log N}{\log z}$$


What this means in practice

- Erdős-Renyi networks can grow to be very large but nodes will be just a few hops apart

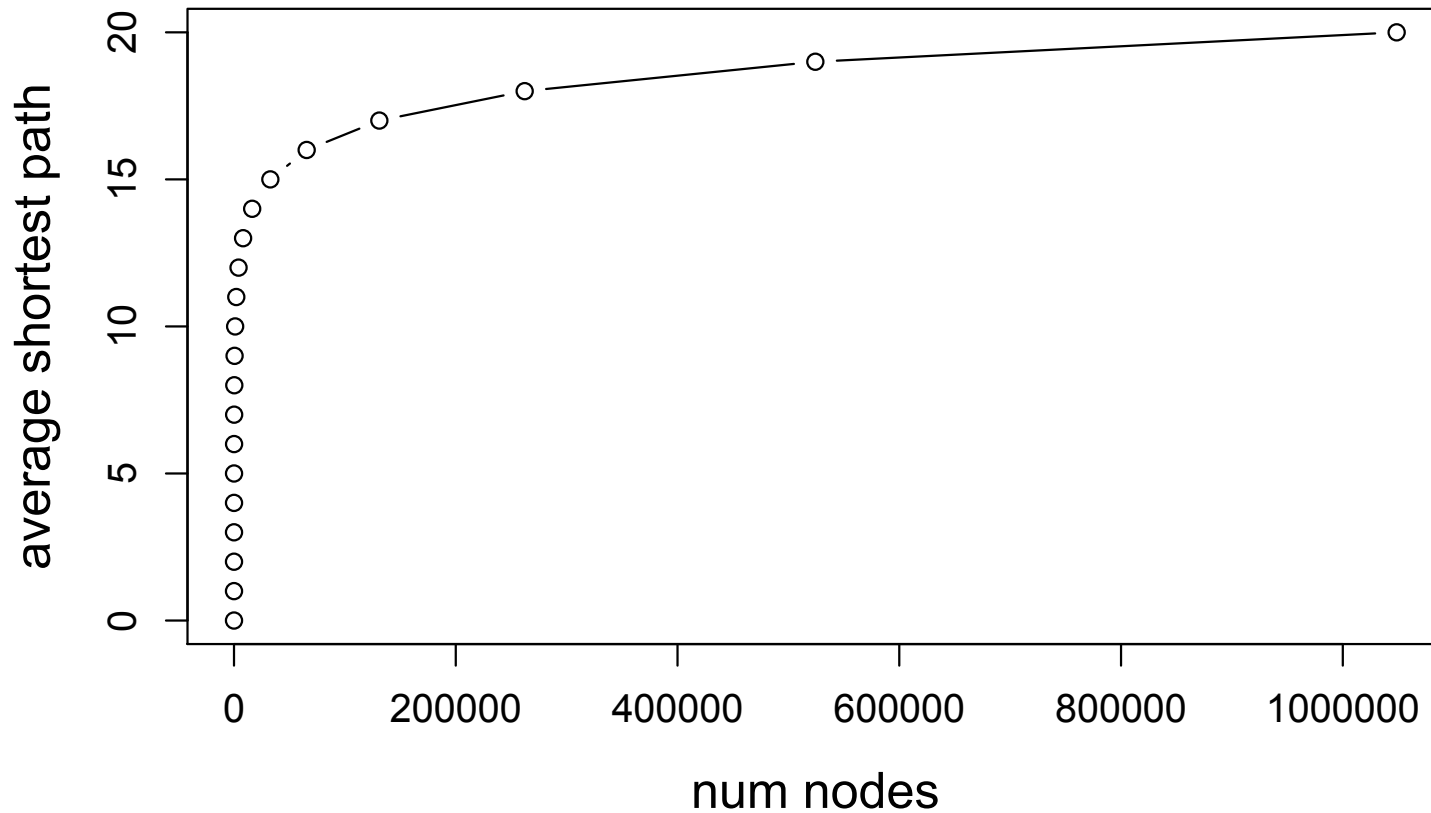


Logarithmic axes

- powers of a number will be uniformly spaced



- $2^0=1, 2^1=2, 2^2=4, 2^3=8, 2^4=16, 2^5=32, 2^6=64, \dots$

Erdős-Renyi avg. shortest path

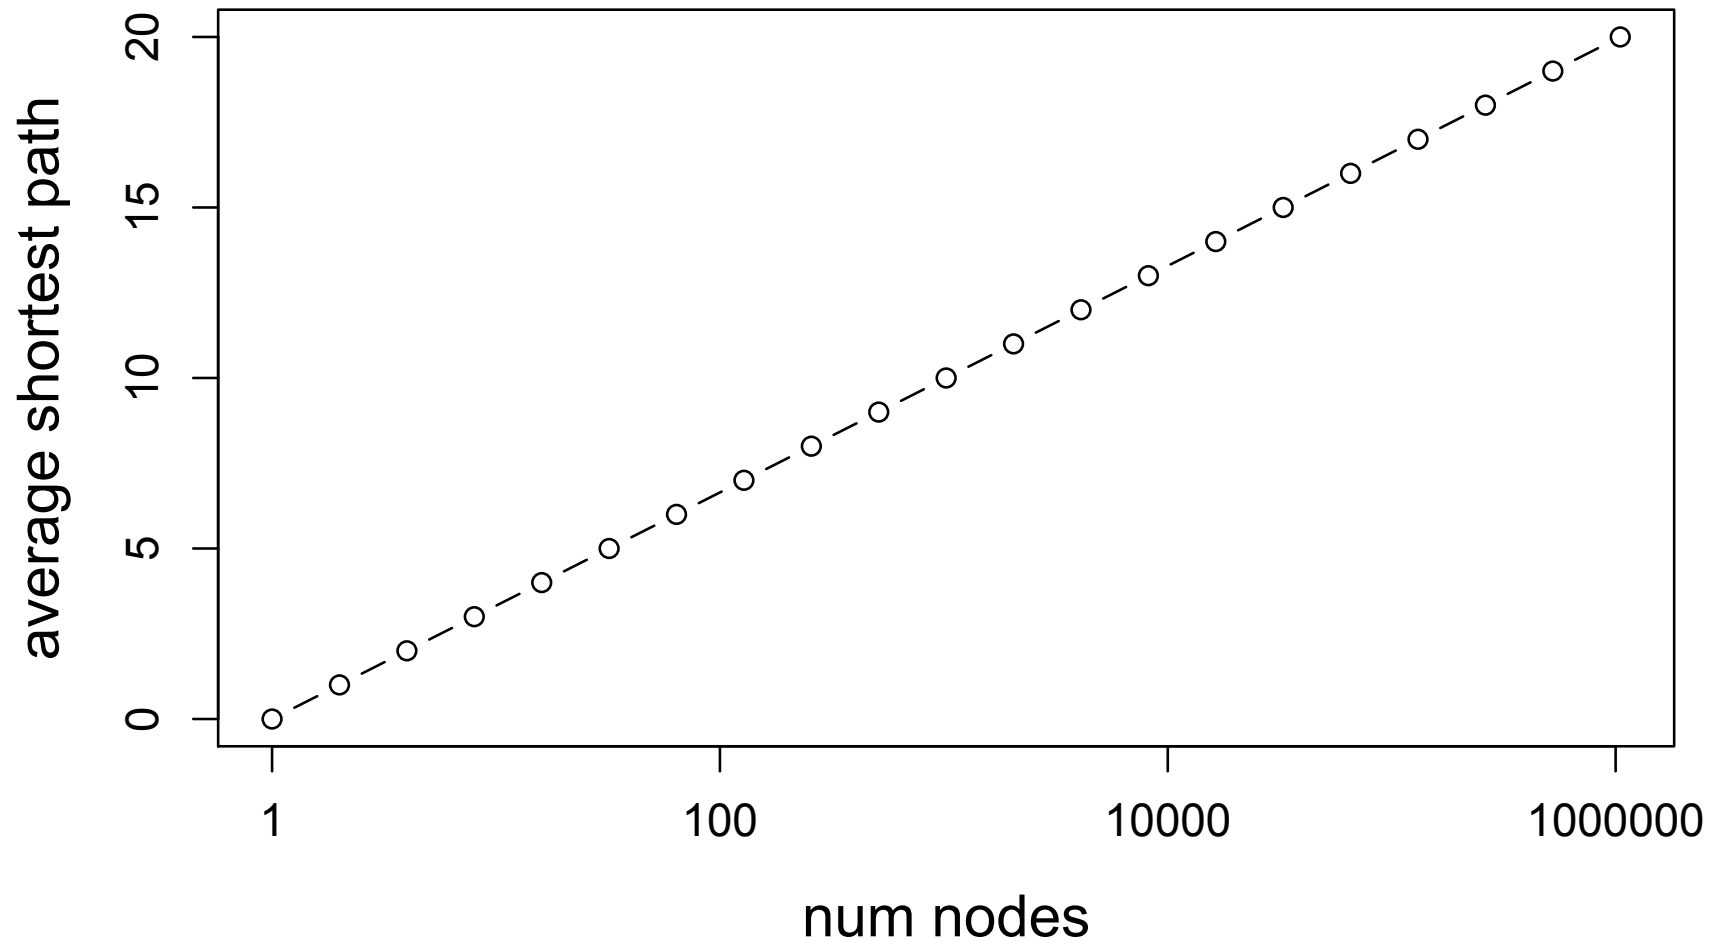

Quiz Q:

- If the size of an Erdős-Renyi network increases 100 fold (e.g. from 100 to 10,000 nodes), how will the average shortest path change
 - it will be 100 times as long
 - it will be 10 times as long
 - it will be twice as long
 - it will be the same
 - it will be 1/2 as long

Realism

- Consider alternative mechanisms of constructing a network that are also fairly “random”.
- How do they stack up against Erdős-Renyi?
- <http://www.ladamic.com/netlearn/nw/RandomGraphs.html>

Introduction model

- Prob-link is the p (probability of any two nodes sharing an edge) that we are used to
- But, with probability prob-intro the other node is selected among one of our friends' friends and not completely at random

Introduction model

num-nodes 50

GC size 50

av. deg 5.72

☒ On prob-or-num?
☐ Off

Erdos-Renyi

prob-link 0.20

introduction

prob-intro 0.83

static-geo

growth

rand-encounter

redo layout


num-neighbors 1

layout options

spring-length 11

spring-constant 0.1

repulsion-strength 2.8

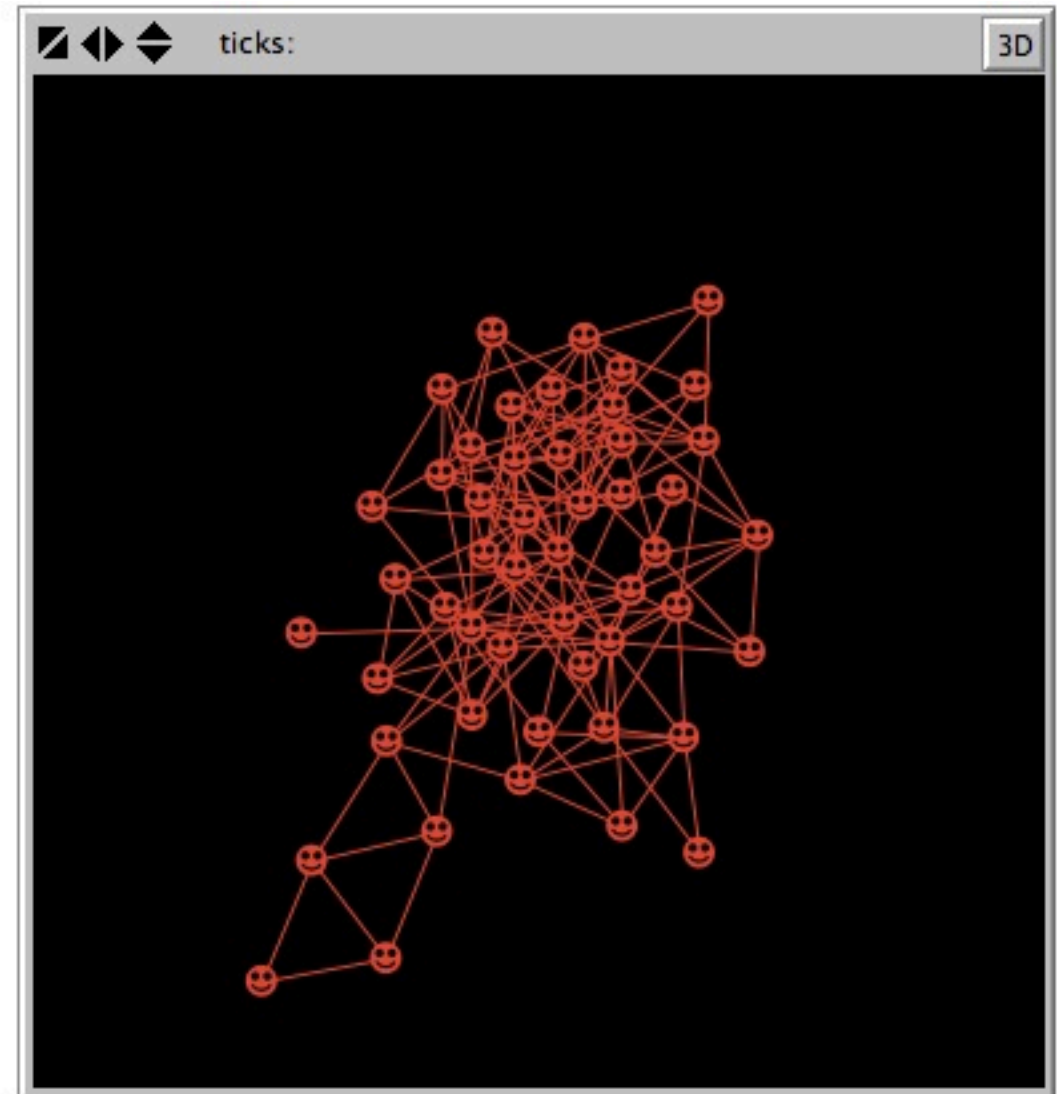


Quiz Q:

- Relative to ER, the introduction model has:
 - more edges
 - more closed triads
 - longer average shortest path
 - more uneven degree
 - smaller giant component at low p

Static Geographical model

- Each node connects to num-neighbors of its closest neighbors
 - use the num-neighbors slider, and for comparison, switch PROB-OR-NUM to 'off' to have the ER model aim for num-neighbors as well
 - turn off the layout algorithm while this is running, you can apply it at the end
-

static geo

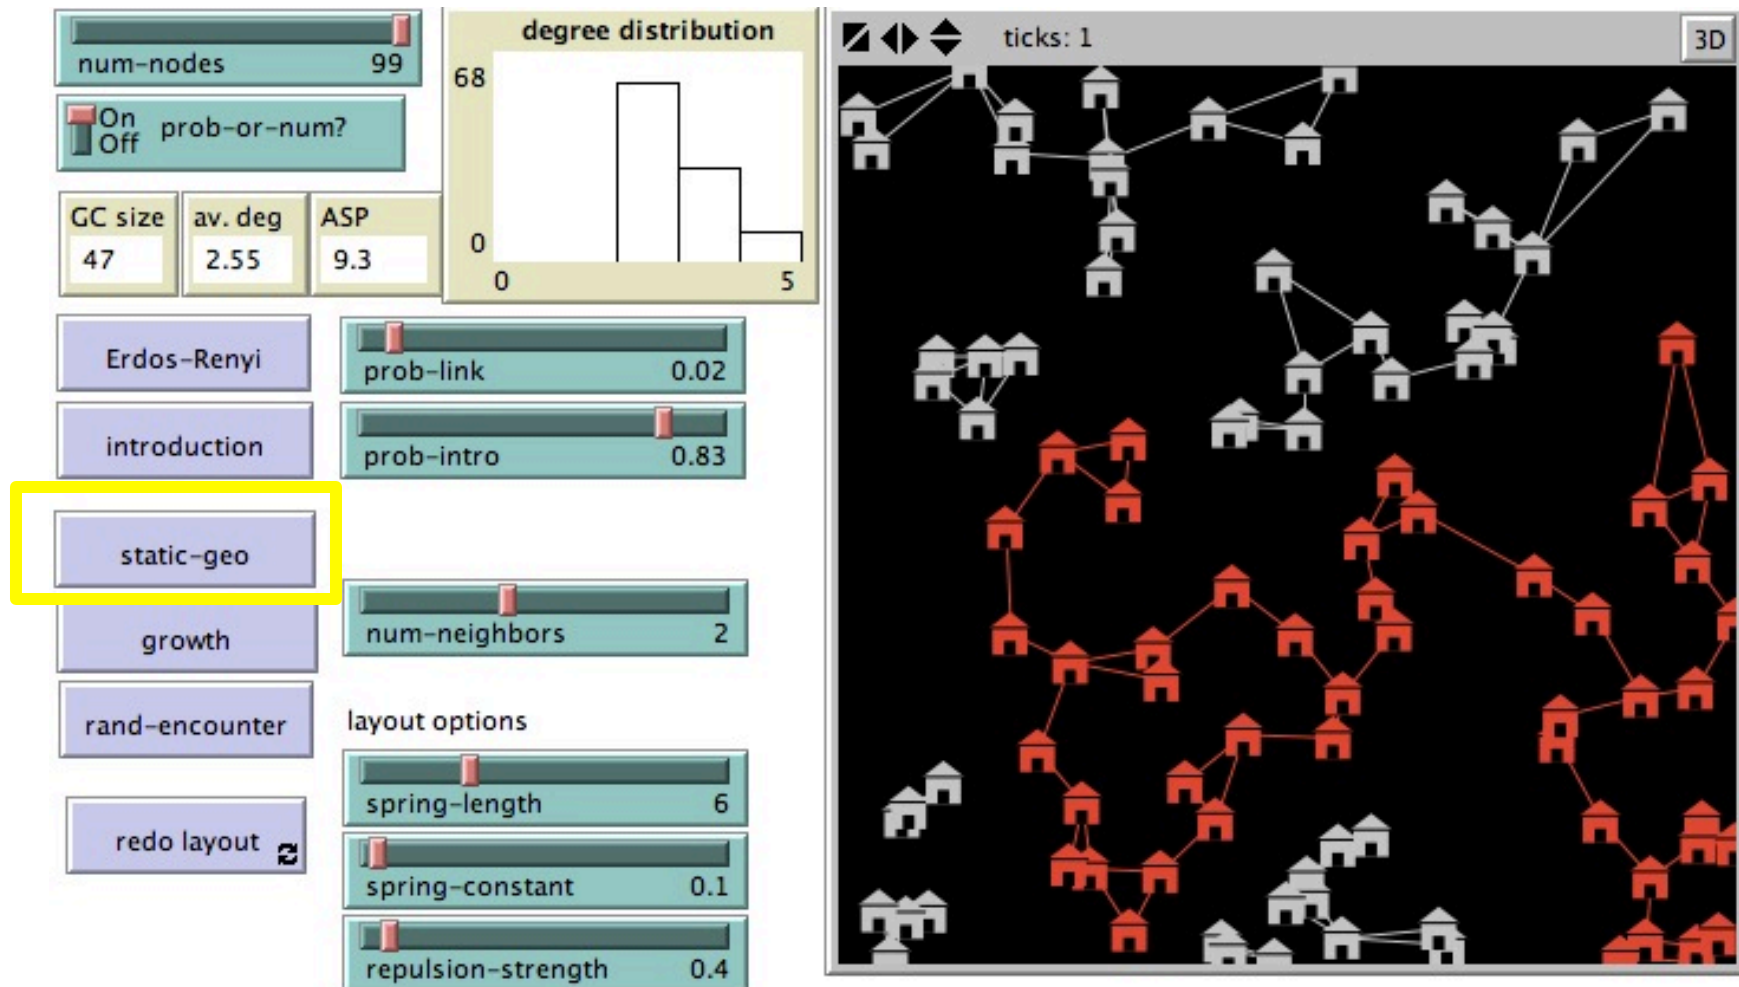


Quiz Q:

- Relative to ER, the static geographical model has :
 - longer average shortest path
 - shorter average shortest path
 - narrower degree distribution
 - broader degree distribution
 - smaller giant component at a low number of neighbors
 - larger giant component at a low number of neighbors

Random encounter

- People move around randomly and connect to people they bump into
- use the num-neighbors slider, and for comparison, switch PROB-OR-NUM to 'off' to have the ER model aim for num-neighbors as well
- turn off the layout algorithm while this is running (you can apply it at the end)

random encounters

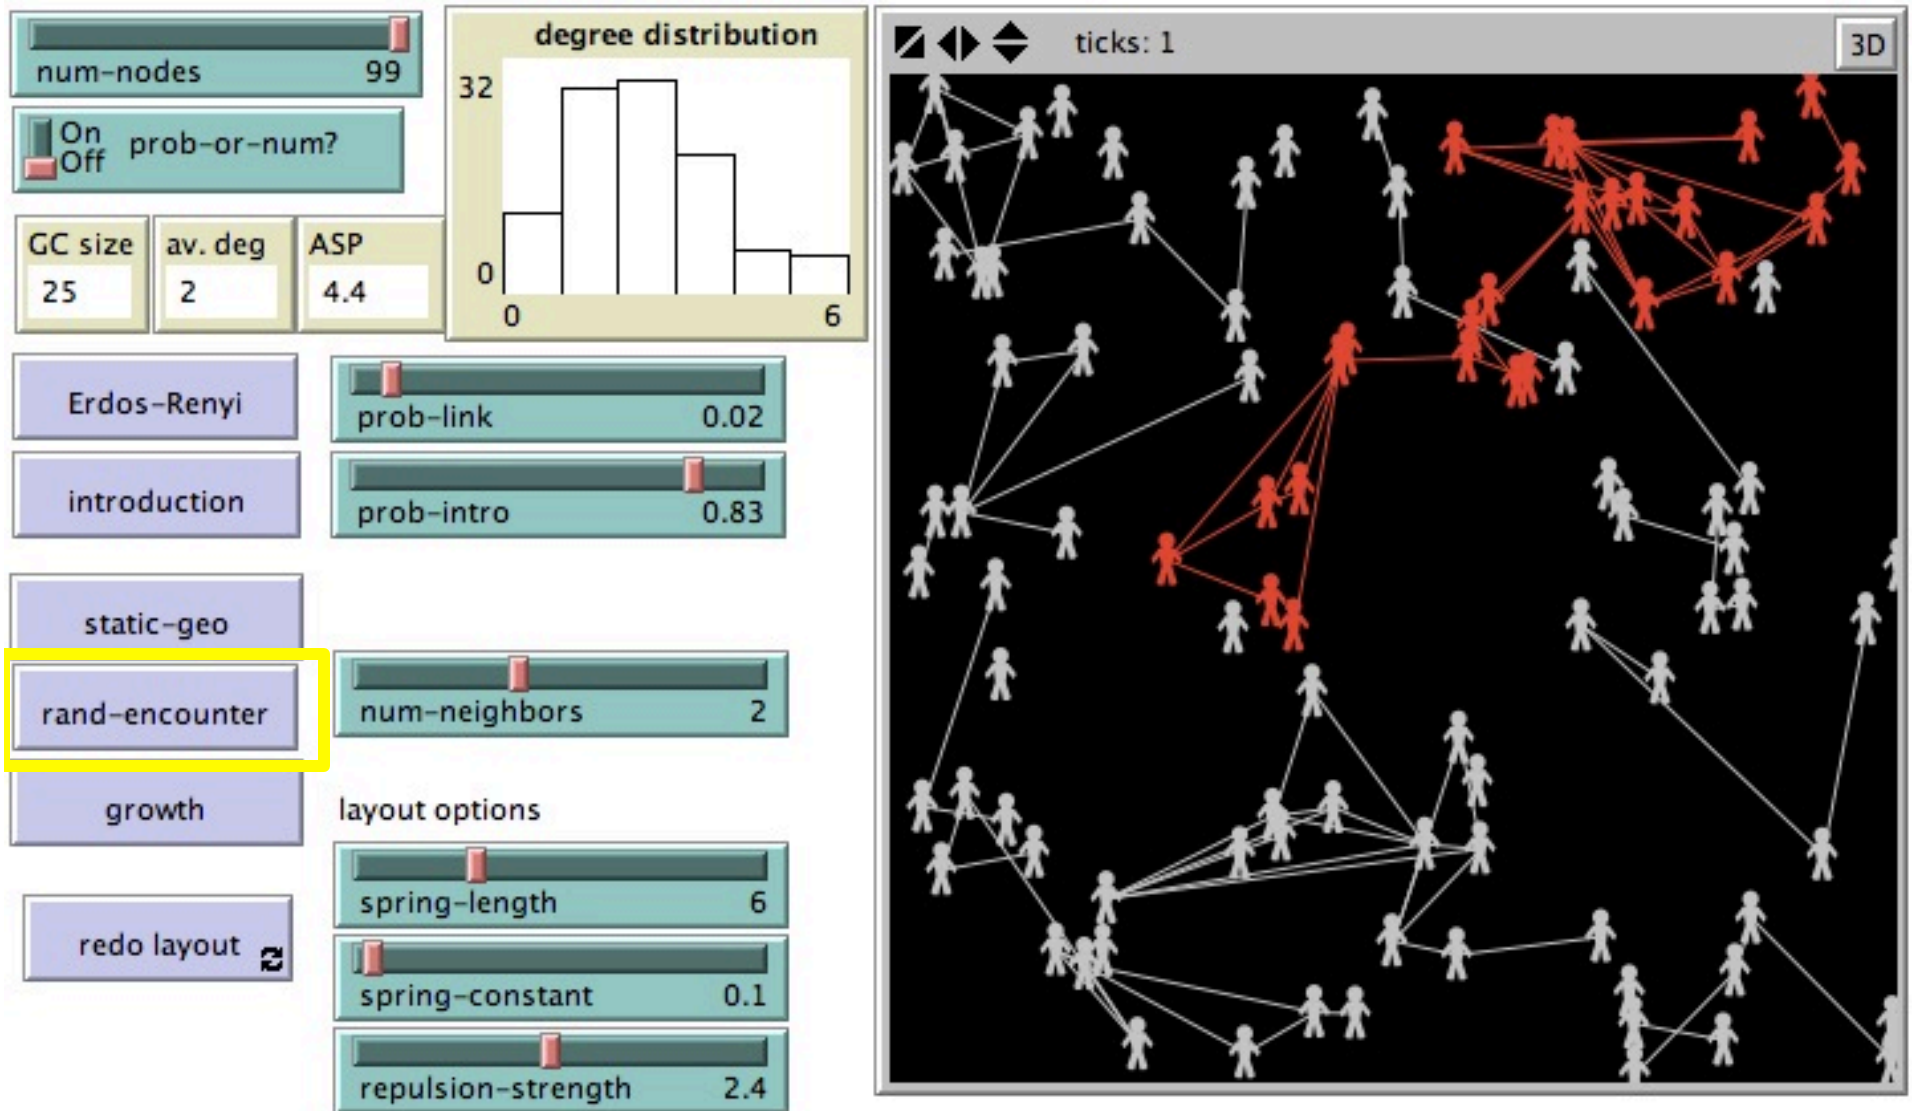


Quiz Q:

- Relative to ER, the random encounters model has :
 - more closed triads
 - fewer closed triads
 - smaller giant component at a low number of neighbors
 - larger giant component at a low number of neighbors

Growth model

- Instead of starting out with a fixed number of nodes, nodes are added over time
 - use the num-neighbors slider, and for comparison, switch PROB-OR-NUM to 'off' to have the ER model aim for num-neighbors as well
-

growth model

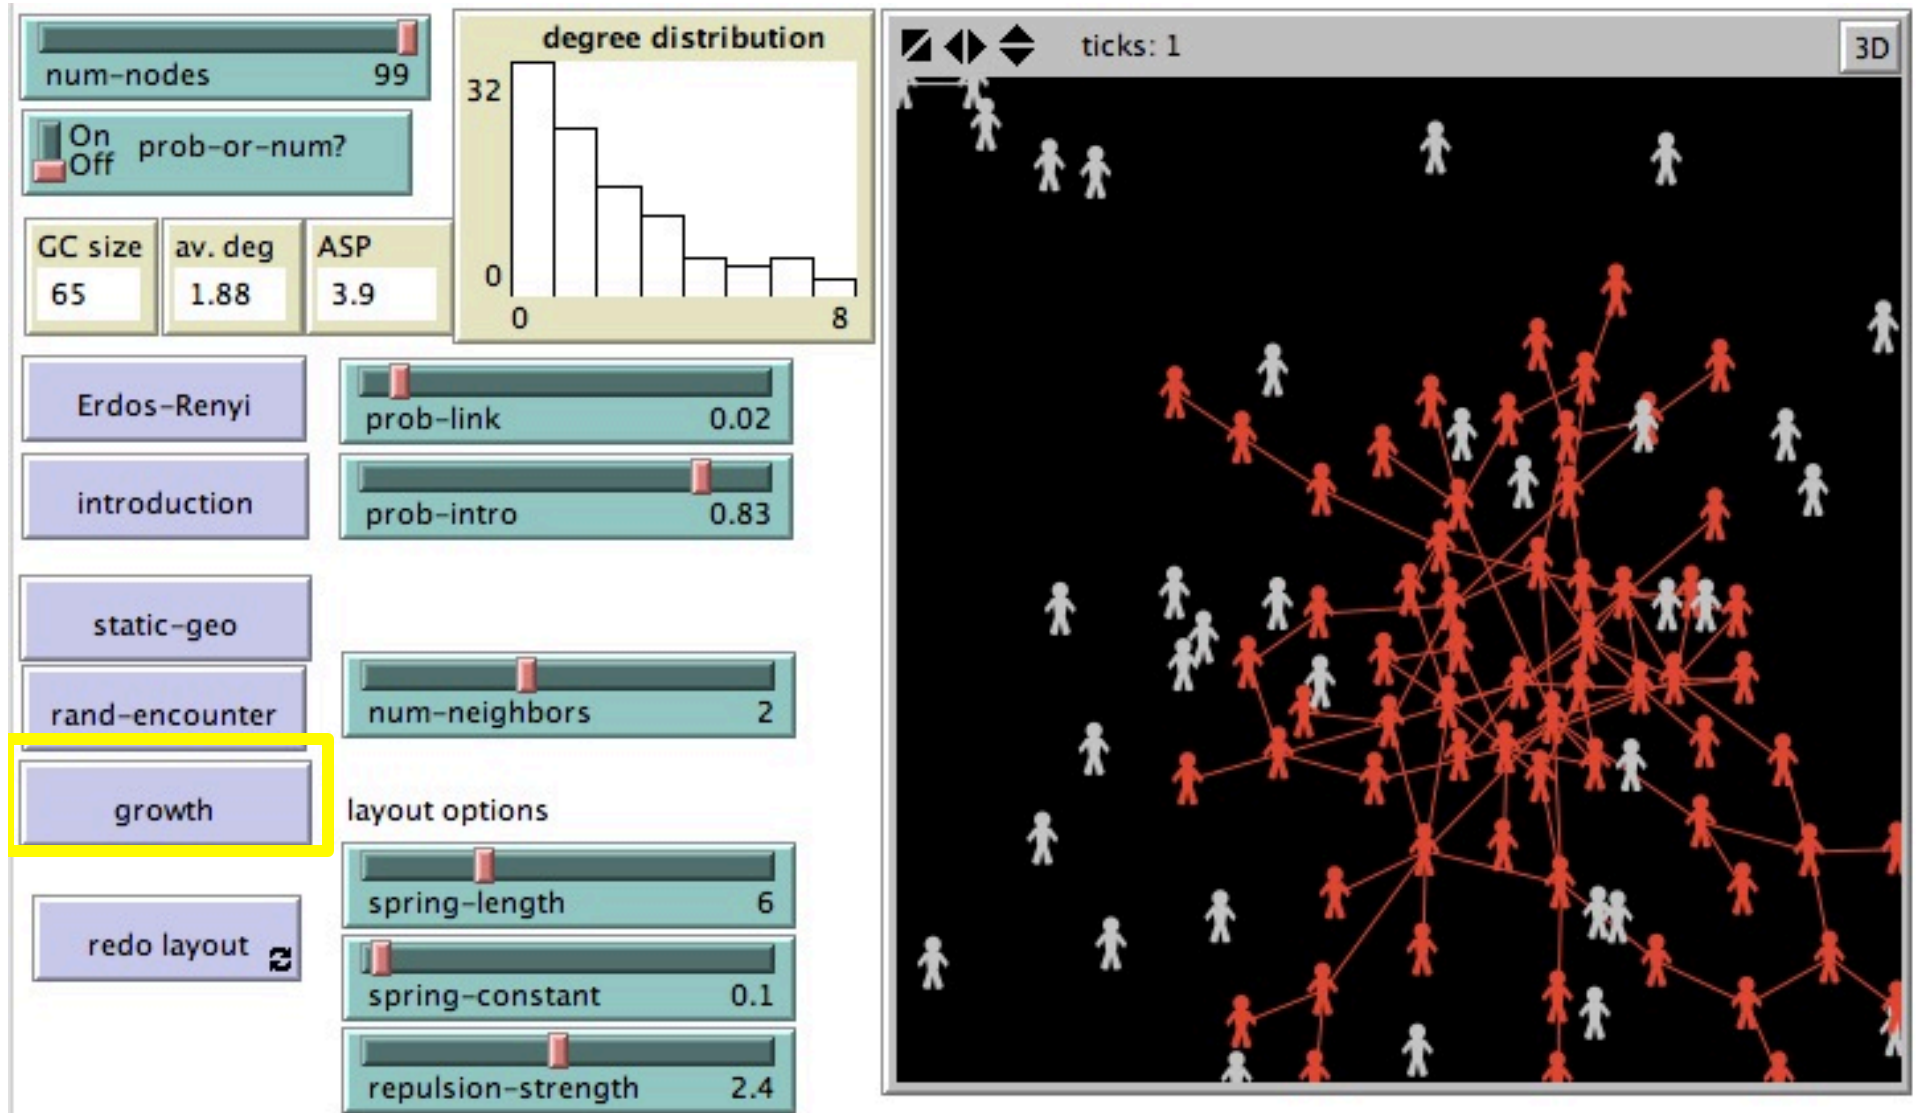

Quiz Q:

- Relative to ER, the growth model has :
 - more hubs
 - fewer hubs
 - smaller giant component at a low number of neighbors
 - larger giant component at a low number of neighbors

other models

- in some instances the ER model is plausible
- if dynamics are different, ER model may be a poor fit